C153-4-082

Bass - midrange driver

| DOMEMATERIAL: | CERAMIC |
|------------------|---------------|
| APPLICATION: BA | SS - MIDRANGE |
| NOMINAL DIAMETER | : 153 mm |
| SENSITIVITY: | 91 dB |
| | |







The C153 - 4 - 082 is a 5 inch bass - midrange driver with ultra hard ceramic dome.


A FEA optimized overhung motor design with 25 mm titanium voice coil former guarantees extraordinary low energy storage and good heat transfer.

The low loss rubber surround and a thin fabric spider center the moving parts with high linearity.

As a typical small home stereo bass - midrange driver, we recommend our C153 - 4 - 082 for an application from 40 Hz – 3000 Hz.

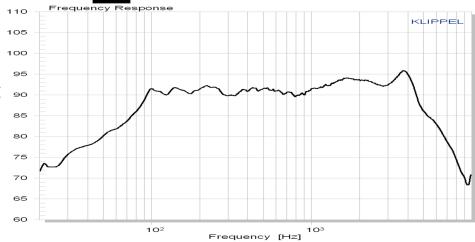

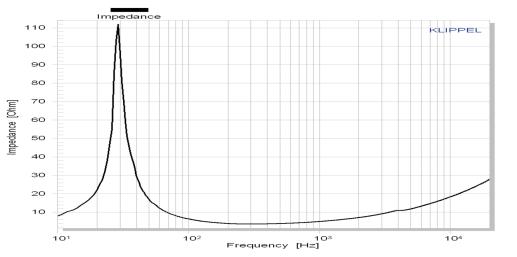


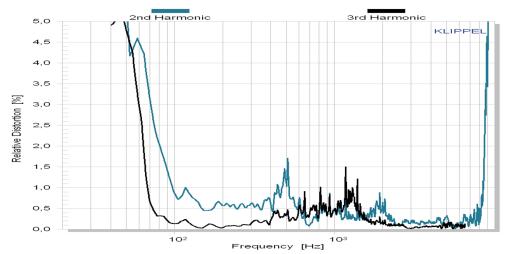

All rights reserved - All data with reservation and subject to change.

Thiel & Partner GmbH Kantstrasse 1 50259 Pulheim T +49 (0) 2238 / 475475 a.bankewitz@accuton.com



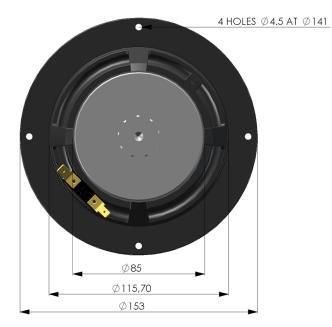



C153-4-082 Bass-midrange driver

| Mechanical data | | |
|--|-------------------------------|----|
| Overall diameter | 153 | mm |
| Cutout hole diameter | 116 | mm |
| Frontplate depth | 4.5 | mm |
| Overall depth | 71 | mm |
| Motor assembly diameter | 85 | mm |
| Motor assembly depth | 34 | mm |
| Screw fitting | DIN 7984, 4mm | |
| Terminal | + : 6.3 x 0.8 / - : 4.8 x 0.8 | mm |
| Shipping weight / net weight (one piece) | 1.48 / 1.28 | kg |
| Shipping size (pair) | 180 / 180 / 240 | mm |

| Thiele/Small Parameters | | | |
|--------------------------|-----|------|-----------------|
| Sensitivity (2.83V / 1m) | Lp | 91* | dB |
| DC-resistance | Re | 3.3 | Ohm |
| Resonance frequency | Fs | 27 | Hz |
| Equivalent volume of air | Vas | 35.5 | L |
| Mechanical Q | Qms | 5.22 | |
| Electrical Q | Qes | 0.17 | |
| Total Q | Qts | 0.16 | |
| Effective piston area | Sd | 83 | Cm ² |
| Moving mass | Mms | 9.6 | g |
| Suspension compliance | Cms | 0.33 | mm/N |
| Mechanical resistance | Rms | 0.31 | kg x s |

| Voice Coil data | | | |
|----------------------------|------|----------|------|
| Power handling | Р | 100* | Watt |
| Linear excursion | Xmax | +/- 5 | mm |
| Voice coil diameter | | 25 | mm |
| Voice coil former material | | Ti | |
| Voice coil material | | Cu | |
| Voice coil inductance | Le | 0.39 | mH |
| Force factor | BI | 5.6 | N/A |
| Motor type | | Overhung | |
| Ferrofluid filling | | no | |

* Please refer to www.accuton.com for exact measurement conditions and further information.