



### CDX14-3060



- 1,000Hz recommended min. crossover freq (12dB/oct)
- Maximum modal suppression phase plug
- Deep - drawn titanium diaphragm with ployimide surround

Flange (4 x M6 holes on a 102mm /4in PCD)  
 Throat exit 35.1mm/1.4in

### 8 Frequency Response

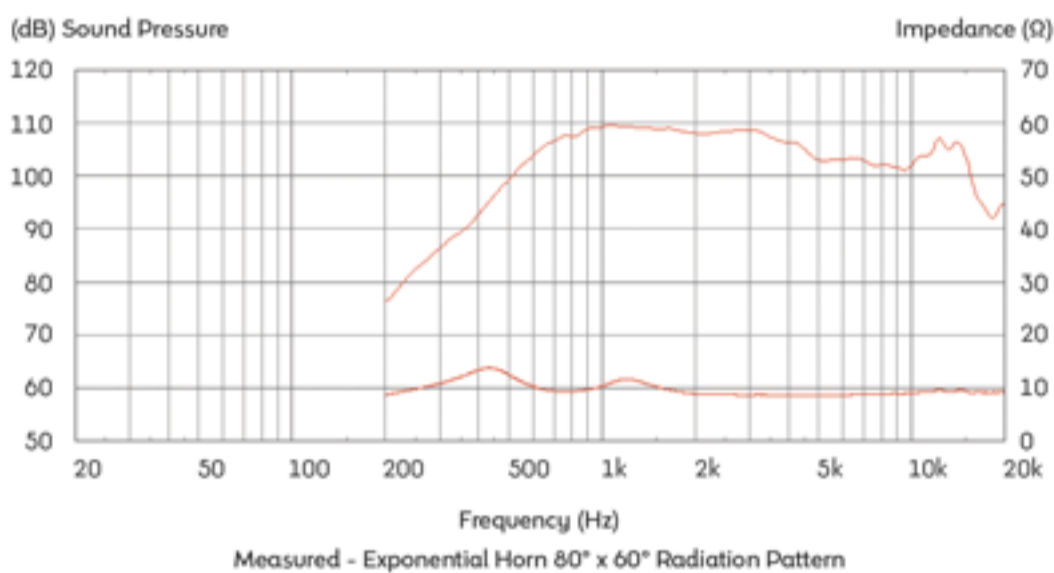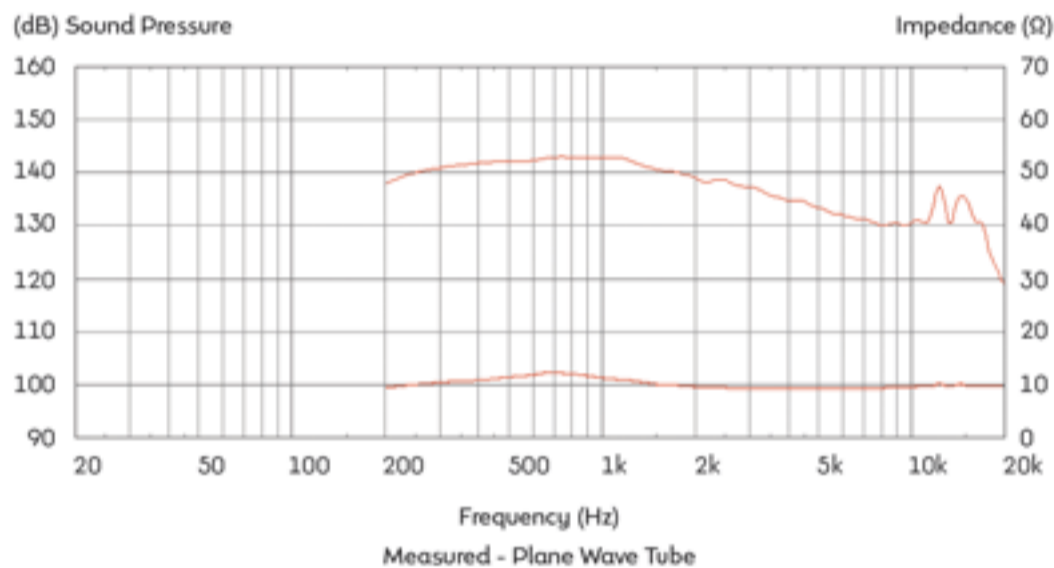

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2Ī anechoic environment.

### General Specifications

Power rating <sup>1</sup>	75Wrms
Continuous power rating <sup>2</sup>	150W
Nominal impedance	8
Frequency range	500-20,000
Sensitivity <sup>3</sup>	106.5dB
Recommended min. crossover (12dB/oct)	1,000Hz 12dB/oct
Voice coil diameter	75mm/3in
Voice coil material	Edgewound Copper Clad Aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Polyimide

### Mounting Information

Width	180mm/7.0in
Depth	71mm/2.8in
Weight	4.9kg/10.8lb
Flange	Flange (4 x M6 holes on a 102mm /4in PCD)
Throat exit	35.1mm/1.4in

### Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm /8.4in x 7.7in x 3.2in
Single pack weight	5.1kg/11.2lb