



CDX20-3075

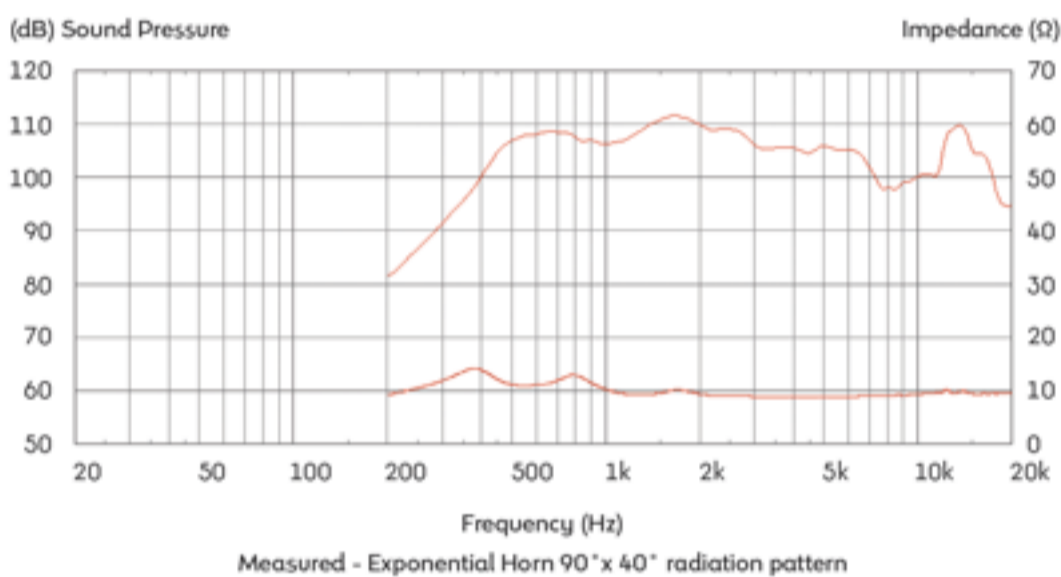

- 800Hz recommended min. crossover freq (12dB/oct)
- Maximum modal suppression phase plug
- Deep-drawn titanium diaphragm with polyimide surround

8 Frequency Response

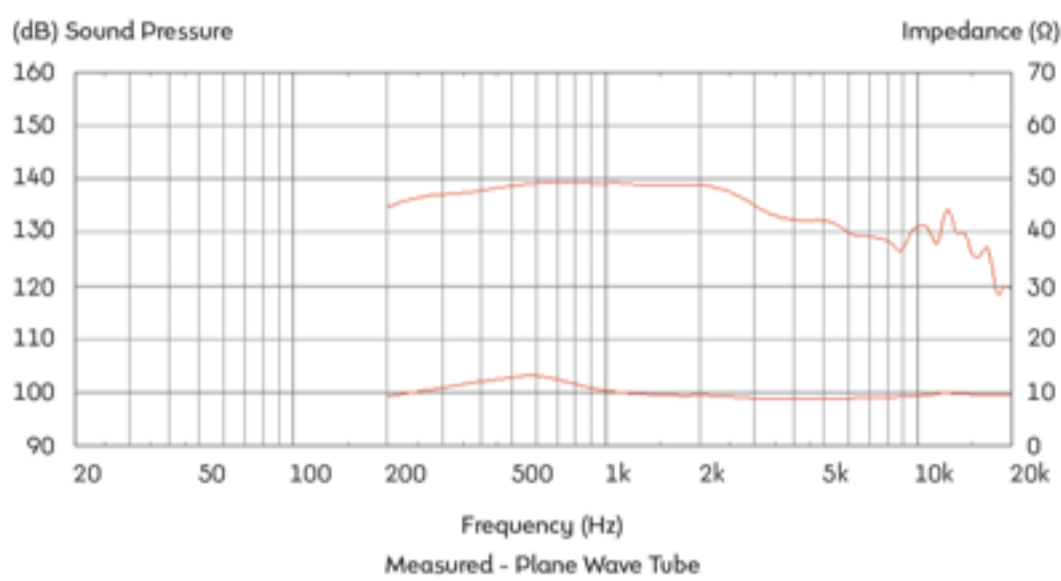

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2Ĥ anechoic environment.

General Specifications

Power rating ¹	75Wrms
Continuous power rating ²	150W
Nominal impedance	8
Frequency range	500-20,000Hz
Sensitivity ³	107dB
Recommended min. crossover (12dB/oct)	800Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Polyimide

Mounting Information

Width	180mm/7.0in
Depth	71mm/2.8in
Weight	4.9kg/10.8lb
Fitting	Flange (4 x M6 holes on 102mm /4inch PCD)
Throat exit	50mm/2in

Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm //8.4in x 7.7in x 3.2in
Single pack weight	5.1kg/11.2lb