


# HORN HF66

Professional High Frequency Transducer

PART NUMBER **13133067**

## Features

- 1-inch/1.4 inch Throat Adaptor
- 60° x 60° Constant Directivity Coverage
- Loading down to 500 Hz
- Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers
- Perfectly Controlled Dispersion


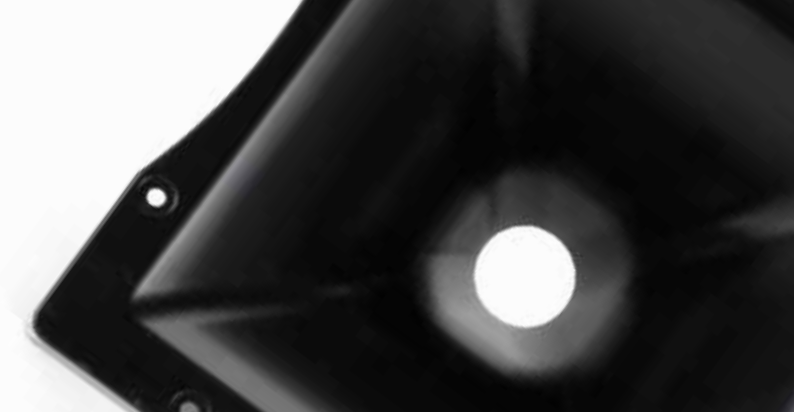


## General Specifications



Throat Diameter	36 / 1.4	mm/inch
Nominal Coverage (-6dB)	60x60	
Cut-off Frequency	500	Hz
Material	Aluminum	

## Mounting Information


Overall Dimensions	250x250	mm
Baffle Cut-out Dimensions	200x200	mm
Total Depth	130	mm
Driver Mounting		
4 x 6.5 mm holes	101/76	mm
Net Weight	1.8	kg
Shipping Weight	2	kg

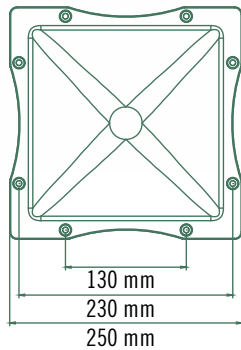


Response 1W/1m

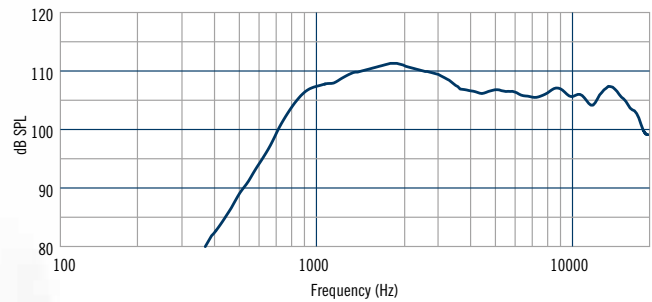


Horizontal 2000 Hz  
1/3 Octave Polars




Horizontal 4000 Hz  
1/3 Octave Polars




Horizontal 8000 Hz  
1/3 Octave Polars



Vertical 2000 Hz  
1/3 Octave Polars



Vertical 4000 Hz  
1/3 Octave Polars



Vertical 8000 Hz  
1/3 Octave Polars

